



TP-Link TL-MR3020 trådløs router Hurtigt ethernet Enkelt band (2,4 GHz) 4G Sølv, Hvid

Mærke : TP-Link

Produktkode: TL-MR3020

Produkt navn : TL-MR3020

TP-Link TL-MR3020. WAN forbindelsestype: RJ-45. Wi-Fi-bånd: Enkelt band (2,4 GHz), Bedste Wi-Fi standard: Wi-Fi 4 (802.11n), WLAN dataoverførsels hastighed (maks): 300 Mbit/s. Ethernet LAN-grænsefladetype: Hurtigt ethernet, Ethernet LAN-datahastigheder: 10,100 Mbit/s, Netværksstandarder: IEEE 802.11b, IEEE 802.11g, IEEE 802.11n. Generering af mobilnetværk: 4G, 3G standard: EVDO, HSPA, HSPA+, UMTS, 4G standard: LTE. Sikkerhedsalgoritmer: 64-bit WEP, 128-bit WEP, WPA-PSK, WPA2-PSK, Firewall sikkerhed: DoS, SPI



WAN-forbindelse		Sikkerhed	
Ethernet WAN *	✓	Understøttelse af DMZ	✓
DSL WAN *	✗	Protokoller	
SIM-kort slot *	✗	DHCP-klient	✓
3G/4G kompatibilitet USB-modem *	✓	DHCP-server	✓
WAN forbindelsestype	RJ-45	Universal Plug and Play (UPnP)	✓
Trådløse LAN funktioner		Design	
Wi-Fi-bånd *	Enkelt band (2,4 GHz)	Produktfarve	Sølv, Hvid
Bedste Wi-Fi standard *	Wi-Fi 4 (802.11n)	Produkttype *	Bordplade router
WLAN dataoverførsels hastighed (maks) *	300 Mbit/s	Godkendelser	
Wi-Fi-standarder	802.11b, 802.11g, Wi-Fi 4 (802.11n)	Compliance-certifikater	RoHS, Federal Communications Commission (FCC), CE
Netværk		Emballage indhold	
Ethernet LAN *	✓	Kabler inkluderet	LAN (RJ-45), USB
Ethernet LAN-grænsefladetype *	Hurtigt ethernet	Hurtig installationsvejledning	✓
Ethernet LAN-datahastigheder	10,100 Mbit/s	Bæredygtighed	
Netværksstandarder	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Overholdelse af bæredygtighed	✓
Portvideresendelse	✓	Antenne	
Port udløsning	✓	Antennedesign *	Intern
Dynamisk DNS (DDNS)	✓	Overfører strøm	20 dBmW
Modtager, følsomhed	270M: -70dBm@10% PER 130M: -73dBm@10% PER 108M: -74dBm@10% PER 54M: -75dBm@10% PER 11M: -86dBm@8% PER 6M: -92dBm@10% PER 1M: -95dBm@8% PER	Strømstyring	
		Strømkilde type *	USB
		Udgangsspænding	5 V
		Udgangsstrøm	1 A
		Driftsbetingelser	

Mobilt netværk		Driftsbetingelser	
Generering af mobilnetværk	4G	Driftstemperatur (T-T)	-10 - 60 °C
3G	✓	Opbevaringstemperatur (T-T)	-40 - 80 °C
3G standard	EVDO, HSPA, HSPA+, UMTS	Relativ luftfugtighed ved drift (H-H)	10 - 90%
4G standard	LTE	Relativ luftfugtighed ved opbevaring (H-H)	5 - 90%
Porte & Grænseflader		Systemkrav	
Ethernet LAN-porte (RJ-45) *	1	Understøttede Windows-operativsystemer	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 2000, Windows 2000 Professional, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 98SE, Windows NT, Windows Vista, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
USB-port *	✓		
Antal USB 2.0-porte	1	Understøttede Linux-operativsystemer	✓
Administrationsfunktioner			
Webbaseret administration	✓	Understøttede Mac-operativsystemer	✓
Wi-Fi-multimedie (WMM)/(WME)	✓		
Servicekvalitet support (QoS)	✓		
Knap til nulstilling	✓		
WPS trykknop	✓		
Sikkerhed			
Sikkerhedsalgoritmer	64-bit WEP, 128-bit WEP, WPA-PSK, WPA2-PSK		
Firewall	✓		
Firewall sikkerhed	DoS, SPI		
Gæstegang	✓		
DoS angrebsforebyggelse	✓		
Forældrekontrol	✓		
Filtrering	✓		
Filtrering af MAC-adresser	✓		
Vægt & størrelser			
Bredde			74 mm
Dybde			67 mm
Højde			22 mm
Emballeringsdata			
Pakkebredde			110 mm
Pakkedybde			109 mm
Pakkehøjde			81,5 mm
Pakkevægt			210 g
Logistik data			
Harmoniseret systemkode (HS)			85176990




0845973051709



845973051709




6935364082345

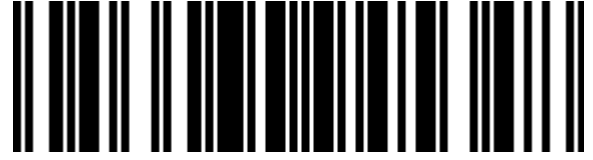


5053460945348




0720591570675



720591570675

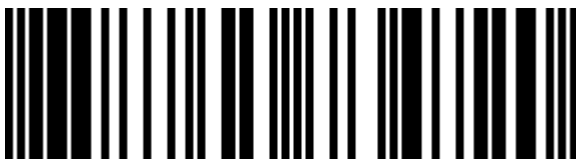

6857845734720

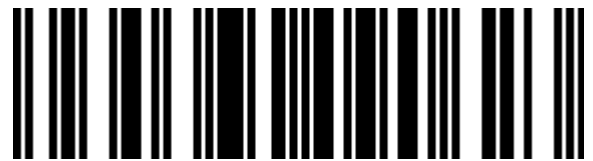

6935364090623



8459730517098



5052415405760

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.