



## TP-Link TL-PA4010KIT 600 Mbit/s Ethernet LAN Hvid 2 stk

Mærke : TP-Link

Produktkode: TL-PA4010 KIT

Produkt navn : TL-PA4010KIT

TP-Link TL-PA4010KIT. Maksimal dataoverførselshastighed: 600 Mbit/s, Netværksstandarder: IEEE 802.3, IEEE 802.3u, Ethernet LAN-grænsefladetype: Hurtigt ethernet. Strømforsbrug (typisk): 4,26 W, Strømforsbrug (standby): 0,88 W. Produktfarve: Hvid, Certificering: CE, FCC. Bredde: 65 mm, Dybde: 52 mm, Højde: 28,5 mm. Compliance-certifikater: RoHS



| Præstation                          |                         | Systemkrav                                 |             |
|-------------------------------------|-------------------------|--|-------------|
| Maksimal dataoverførselshastighed * | 600 Mbit/s              | Understøttede Windows-operativsystemer     | ✓           |
| Ethernet LAN *                      | ✓                       | Understøttede Linux-operativsystemer       | ✓           |
| Ethernet LAN-grænsefladetype        | Hurtigt ethernet        | Mac kompatibilitet                         | ✓           |
| Ethernet LAN-datahastigheder        | 10,100 Mbit/s           | Understøttede Mac-operativsystemer         | ✓           |
| Kobber ethernet kabelteknologi      | 10BASE-T, 100BASE-TX    |  |             |
| Ethernet LAN-porte (RJ-45)          | 1                       |  |             |
| Wi-Fi *                             | ✗                       |  |             |
| Netværksstandarder *                | IEEE 802.3, IEEE 802.3u | <b>Driftsbetingelser</b>                   |             |
| Indbygget stikkontakt *             | ✗                       | Driftstemperatur (T-T)                     | 0 - 40 °C   |
| PowerLine standard                  | HomePlug AV             | Opbevaringstemperatur (T-T)                | -40 - 70 °C |
| Modulation                          | OFDM                    | Relativ luftfugtighed ved drift (H-H)      | 10 - 90%    |
| Sikkerhedsalgoritmer                | 128-bit AES             | Relativ luftfugtighed ved opbevaring (H-H) | 5 - 90%     |
| Maksimal driftstilstand             | 300 m                   |  |             |
| Krypteringsknap                     | ✓                       | <b>Vægt &amp; størrelser</b>               |             |
| Plug and play                       | ✓                       | Bredde                                     | 65 mm       |
|                                     |                         | Dybde                                      | 52 mm       |
|                                     |                         | Højde                                      | 28,5 mm     |
| <b>Strømstyring</b>                 |                         | <b>Godkendelser</b>                        |             |
| Strømforsbrug (typisk)              | 4,26 W                  | Compliance-certifikater                    | RoHS        |
| Strømforsbrug (standby)             | 0,88 W                  |  |             |
| <b>Design</b>                       |                         | <b>Emballage indhold</b>                   |             |
| LED-indikatorer                     | ✓                       | Antal pr. pakke *                          | 2 stk       |
| Produktfarve *                      | Hvid                    | Hurtig installationsvejledning             | ✓           |
| Certificering                       | CE, FCC                 | Kabler inkluderet                          | LAN (RJ-45) |
|                                     |                         | <b>Logistik data</b>                       |             |
|                                     |                         | Harmoniseret systemkode (HS)               | 85171800    |



0845973032029




845973032029




6935364031985




0617407586961



617407586961

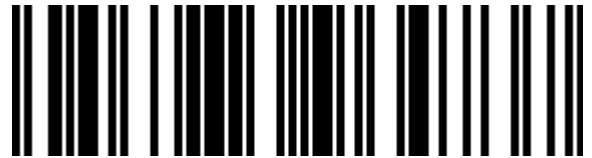

5053973964737

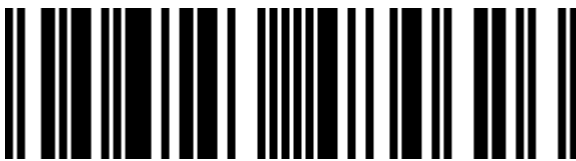

4056256484626




4056203013268



4057057324845



5053390951631

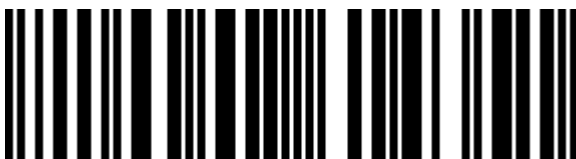

1210002614351

## Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.